ANCHOR PRO

ANLTCM Series

Motorized Projector Lift










Anchor CM series motorized projector lift, uses a single arm structure made of aluminum alloy unlike the commonly available scissor lifts. This will avoid the front to back and side to side swinging of the installed projectors. The security of usage is ensured by the anti-broken structure. This series is available in three different models with a drop of 50 cm, 100 cm and 150 cm. Besides these three standard sizes, any custom size can be produced within 2 meters travel distance as per order.

Load capacity of this range is 40 kilograms / unit and these products are CE and RoHS certified.

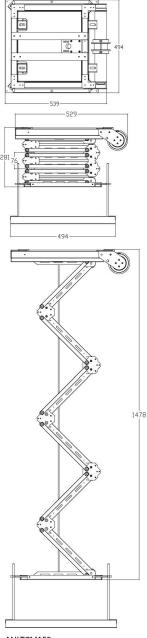

ANLTCM150

Ultra thin design, thickness is only 260mm, single-armed structure is made from aluminum alloy, which can avoid the front-to-back and side-to-side swing problem


Arm sections: 6


Overall dimension: 453 x 528 x 281 mm Ceiling opening: 500 x 500 mm | 550 x 550 mm


Traveling distance: 290-1500 mm Distance from ceiling to false ceiling: 520-1500 mm

For, more information contact:

Anchor AV, P.O. Box 121071, Dubai, U.A.E. Tel: +971 4 3706522, Email: enquiry@anchorav.com








ANLTCM100


Ultra thin design, thickness is only 210mm, single-armed structure is made from aluminum alloy, which can avoid the front-to-back and side-to-side swing problem.


Arm sections: 4

Overall dimension: 453 x 528 x 210 mm Ceiling opening: 500 x 500 mm | 550 x 550 mm

Traveling distance: 210-990 mm Distance from ceiling to false ceiling: 450-1000 mm







ANLTCM50

Ultra thin design, thickness is only 129mm, single-armed structure is made from aluminum alloy, which can avoid the front-to-back and side-to-side swing problem.

Arm sections: 2

Overall dimension: 453 x 528 x 129 mm Ceiling opening: 500 x 500 mm | 550 x 550 mm

Traveling distance: 130-520 mm Distance from ceiling to false ceiling: 350-550 mm







Joint





Controller

Projector

Main Body

ANCHOR PRO

Copyright © 2020 Anchorav, logo are registered trademarks.

All specifications subject to change at any time. All other trademarks are the property of their respective owners.